

IDOME by uwe

Technical Specifications, Dimensions and UV-Type*

		IDOME SWING
Unit model		350 48 10 K
Power	[kW]	13,5
Electical connection	[V]	220 V 3~60 Hz
Protection Fuse	[A]	3 x 60 A (K50)
Weight	[pound]	ca. 1278.7
Dimensions	[inch]	
Length Door Closed		55" (4' 7")
Width		58" (4' 10")
Height		94" (7' 10")
Length iDOME open	[inch]	77" (6' 5")
Recommended minimum dimension cabin L x D	[inch]	94.50 x 94.50
Noise emission ≤ 70 dB (A).		
Room temperature for operation max. 35° C		
The installation site must have a loading capacity of at least 500 kg/m ² and must be flat.		

*We reserve the right to make technical modifications.

		IDOME SWING	
Unit model		350 48 10 K	
		Lamps	UV-TYP nach/to EN 60335-2-27
Panel, body			
Panel backgroundlighting		2 x TL-D 36 W 18 blau / blue	
Panel hand rail illumination uwe logo		2 x LED control board	
Roof, shoulder tanning		3 x POWERSPOT 250 W	
Facial tanner		7 x POWERSPOT 250 W	
Translucent canopy RGB		6 X LED	
Translucent canopy tubes		2 x 36 W red / blue / green / amber / yellow	

CAUTION: CONNECT ONLY TO A CIRCUIT PROTECTED BY A CLASS A GROUND FAULT CIRCUIT INTERRUPTER. (ONLY FOR CANADA).

ATTENTION: BRANCHER SEULEMENT A UNE DERIVATION PROTEGÉE PAR UN DISJONCTEUR DIFFERENTIEL DE CLASSE.

! Turn off the power to the unit before changing lamps.

RELAMPING INSTRUCTIONS REPLACEMENT LAMP TYPES

CAUTION: REPLACE ONLY WITH ORIGINAL LAMPS OR FDA APPROVED EQUIVALENT

Cover of lamps (filter discs)

The UV light sources in the panels are covered by 2.5 mm acrylic panels.

The acrylic panels are frosted on the lamp side.


The three high-pressure lamps in the roof module are covered by 3 mm acrylic panels.

CUSTOMER SERVICE ADDRESS

PC MARKETING
1040 WILT AVENUE
RIDGEFIELD, NJ 07657

1-800-FAST TAN
1-800-327-8826

www.pcmarketinguwe.com

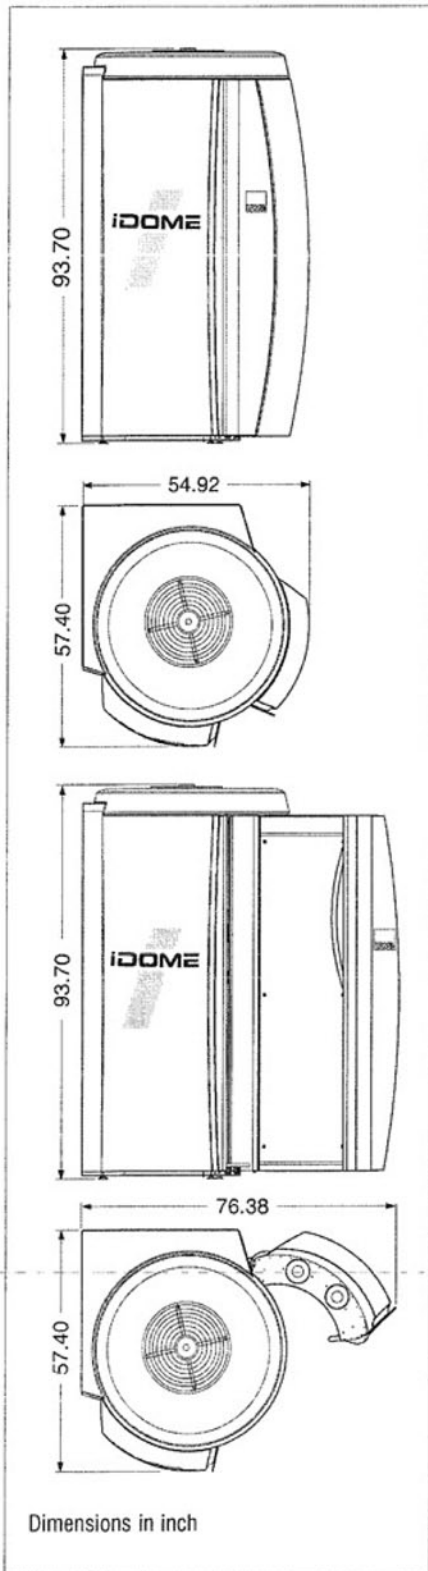

Est. 1986